

FORM PTO-1390 (Modified)
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

PF980080

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/856844

INTERNATIONAL APPLICATION NO.
PCT/EP99/09025INTERNATIONAL FILING DATE
11 NOVEMBER 1999 (11.11.99)PRIORITY DATE CLAIMED
25 NOVEMBER 1998 (25.11.98)

TITLE OF INVENTION

PROCESS AND DEVICE FOR CODING IMAGES ACCORDING TO THE MPEG STANDARD FOR THE INSETTING
OF IMAGETTES

APPLICANT(S) FOR DO/EO/US

Frederic Plissonneau, Jean-Yves Aubie, Pierre Ruellou and Alain Sorin

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ A copy of the International Search Report (PCT/ISA/210). attached to Item 13
8. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98. with one reference attached.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☒ Certificate of Mailing by Express Mail
20. ☒ Return postcard receipt

~~Other items or information~~**CERTIFICATE OF MAILING UNDER 37 CFR 1.10**

EL682 442613US

MAY 25, 2001

"Express Mail" mailing no.

Date of Deposit

I hereby certify that this application is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Anelia F. Urban

Typed or printed name of person
mailing application

Anelia F. Urban
Signature of person mailing
application

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Frédéric Plissonneau et al.
Filed : Herewith
For : PROCESS AND DEVICE FOR CODING IMAGES ACCORDING
TO THE MPEG STANDARD FOR THE INSETTING OF IMAGETTES

PRELIMINARY AMENDMENT

Hon. Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Sir:

In the US national phase application of PCT/EP99/09025
please enter the following amendments.

IN THE SPECIFICATION:

Please amend the specification as follows:

On Page 1, following the title, insert this paragraph and the following headings:

--This application claims the benefit under 35 U.S.C.
§ 365 of International Application PCT/EP99/09025, filed November 11,
1999, which was published in accordance with PCT Article 21(2) on
June 2, 2000 in English, and which claims the benefit of French
Application No. 98/14851, filed November 25, 1998.

BACKGROUND OF THE INVENTION

1. Field of the Invention--

Page 1, line 6 insert as heading: --2. Description of Prior Art--

Page 1, line 24 insert as heading: --SUMMARY OF THE INVENTION--

Page 4, line 1 insert as heading: --BRIEF DESCRIPTION OF THE
DRAWINGS--

Page 4, line 10 insert as heading: --DETAILED DESCRIPTION--

A clean copy of the amended specification pages 1-5 are attached.

IN THE CLAIMS:

Please amend all the claims on the Annexes (pages 13-14) as shown on the clean copy below and the marked up version attached.

1. (Amended) Process for coding images according to the MPEG standard, for the inseting of at least one imagette into an image, utilizing the inter mode with motion estimation with respect to a reference image and the intra mode, wherein:

- an exclusion zone which includes the macroblocks which lie even partially in the location of the imagette is defined in the reference image,
- the motion estimation of the macroblocks of the image not belonging to the exclusion zone does not take account of an image block belonging to the exclusion zone in the reference image.
- macroblocks belonging to the exclusion zone of the image are replaced by macroblocks making up the imagette.

2. (Amended) Process according to Claim 1, wherein the inter mode for the coding of the macroblocks of the image belonging to an exclusion zone is an inter mode with null motion vectors.

3. (Amended) Process according to Claim 1, wherein the intra mode is forced for the coding of the macroblocks of the image belonging to an exclusion zone.

4. (Amended) Process according to Claim 1, wherein it carries out a marking of the macroblocks of the reference image belonging to the exclusion zone.

5. (Amended) Process according to Claim 4, wherein the marking consists in performing a transcoding of the luminance values of the macroblocks by decrementing the values equal to the maximum coding value and then by forcing the luminance values of the macroblocks belonging to the exclusion zone to this maximum value.

6. (Amended) Process according to Claim 1, wherein, for a given row of macroblocks, the coding allocates a specific slice for the macroblocks belonging to an exclusion zone.

7. (Amended) Process for inserting an imagette into an image coded according to the process of Claim 3, wherein the macroblocks of an intra-coded slice are replaced by macroblocks relating to the imagette.

8. (Amended) Process according to Claim 7, wherein the replacement consists of a recovery of the intra-coded macroblocks corresponding to the exclusion zones, a baseband decoding of these macroblocks, a mixing with the imagette to be inset into the exclusion zone, a coding of the image obtained so as to provide the replacement macroblocks.

9. (Amended) Process according to Claim 7, wherein the coding adapts the quantization interval for the macroblocks belonging to the exclusion zone as a function of the cost of coding the macroblocks to be inserted.

10. (Amended) Device for coding digital video data according to the MPEG standard for the insetting of at least one imagette into an image, comprising a subtractor receiving on a first input an intra macroblock and on a second input a predicted macroblock to be subtracted from the intra macroblock so as to provide an inter macroblock, a circuit for selecting an inter or intra mode receiving the corresponding intra macroblock or inter macroblock for selecting one of the macroblocks according to an energy criterion, a circuit for transforming and quantizing the macroblock selected so as to provide a macroblock of quantized coefficients a circuit for the variable-length coding of the macroblock of quantized coefficients and a buffer memory for providing a data stream at the output of the coding device, an inverse quantization and inverse transformation circuit for obtaining a macroblock reconstituted from the macroblock of quantized coefficients in an adder of the reconstituted macroblock, a memory and predictor for storing the reconstructed macroblock and providing a reconstructed image, a motion estimator receiving the intra macroblock and the reconstructed macroblocks so as to provide a motion vector for the memory and predictor so as to calculate the predicted block, a regulating circuit receiving information form the buffer memory so as to set a quantization interval for the transform and quantization circuit, wherein:

- the selection circuit and the motion estimation circuit receive an information item pertaining to an exclusion zone which includes the macroblocks lying, even partially, in the location of the imagette,
 - the selection circuit forces the intra-coding of the macroblocks belonging to this exclusion zone,
 - the motion estimation circuit calculates the motion vectors while eliminating the motion vectors pointing from the blocks of the reconstructed image belonging to the exclusion zone
- and in that it comprises a substitution circuit to substitute, in the data stream, macroblocks corresponding to the exclusion zone by macroblocks coding the imagette.

11. (Amended) Device according to Claim 10, wherein the regulating circuit receives the information item defining an exclusion zone so as to adapt the quantization interval of the transform and quantization circuit for the macroblocks in this exclusion zone.

IN THE ABSTRACT:

Please add the attached Abstract.

REMARKS

The specification has been amended to include a reference to the priority application, add headings and correct grammatical errors.

The above amendments to the claims have been made to eliminate reference indicia and meet the requirements of the USPTO.

To meet the requirements of the United States, the Abstract, as taken from the published international application, has been amended.

No fee is believed to have been incurred by virtue of this amendment. However if a fee is incurred on the basis of this amendment, please charge such fee against deposit account 07-0832.

Respectfully submitted,

FRÉDÉRIC PLISSONNEAU ET AL.



Ronald H. Kurdyla
Registration No. 26,932
609/734-9701

THOMSON multimedia Licensing Inc.
Patent Operations
PO Box 5312
Princeton, NJ 08543-5312

May 25, 2001

Process and device for coding images according to the MPEG standard for the insetting of imagerettes

This application claims the benefit under 35 U.S.C. § 365 of
5 International Application PCT/EP99/09025, filed November 11, 1999, which was
published in accordance with PCT Article 21(2) on June 2, 2000 in English, and
which claims the benefit of French Application No. 98/14851, filed on
November 25, 1998.

10 BACKGROUND OF THE INVENTION

1. Field of the Invention

The invention relates to an image coding process for the insetting of
an imagerette into an image coded according to the MPEG standard.

2. Description of Prior Art

Until the last few years, the images produced were generally
transmitted and exchanged between television signal broadcasting operators in
uncompressed form, that is to say in clear.

When it was necessary to adapt a source programme, the
processing of the images was carried out on the basis of professional hardware.
For example, when a director needed to utilize a report from a concurrent
channel, he could readily, with the aid of a mixer, insert his own logo,
information such as subtitles, the score of a match, etc. without additional
25 equipment.

Now that the broadcasting and exchanging of data are performed in
the form of compressed data, for example according to the MPEG standard, the
insetting techniques require additional hardware: a decoder for bringing the
compressed images into baseband at the input of the mixer, a coder for re-
30 encoding the sequences after they have been modified. Moreover, to perform a
re-encoding of better quality, it may be necessary to implement a decoder/coder
pair which is aware of how to manage assistance information which is added to

the coded signal and passes through all the studio equipment before reaching the re-encoder, thereby making the system complex.

SUMMARY OF THE INVENTION

5 The purpose of the invention is to alleviate the aforesaid drawbacks.

Its subject is a process for coding images according to the MPEG standard, for the inseting of at least one imagette into an image, utilizing the inter mode with motion estimation with respect to a reference image and the intra mode, characterized in that:

- 10 - an exclusion zone which includes the macroblocks which lie even partially in the location of the imagette is defined in the image,
- the motion estimation of the macroblocks of the image not belonging to the exclusion zone cannot take account of an image block belonging to the exclusion zone in the reference image.

15 According to a particular mode of implementation, the inter mode for the coding of the macroblocks of the image belonging to an exclusion zone is an inter mode with null motion vectors.

20 According to a particular mode of implementation, the intra mode is forced for the coding of the macroblocks of the image belonging to an exclusion zone.

 According to a particular mode of implementation, it carries out a marking of the macroblocks of the reference image belonging to the exclusion zone.

25 According to a particular mode of implementation, the marking consists in performing a transcoding of the luminance values of the macroblocks by decrementing the values equal to the maximum coding value and then by forcing the luminance values of the macroblocks belonging to the exclusion zone to this maximum value.

30 According to a particular mode of implementation, for a given row of macroblocks, the coding allocates a specific slice for the macroblocks belonging to an exclusion zone.

The invention also relates to a process for inserting an imagette into an image coded according to the process described above, characterized in that the macroblocks of an intra-coded slice are replaced by macroblocks relating to the imagette.

5 According to a particular mode of implementation, the replacement consists of a recovery of the intra-coded macroblocks corresponding to the exclusion zones, a baseband decoding of these macroblocks, a mixing with the imagette to be inset into the exclusion zone, a coding of the image obtained so as to provide the replacement macroblocks.

10 According to a particular mode of implementation, the quantization interval for the coding of the macroblocks belonging to the exclusion zone is a function of the cost coding the macroblocks to be inserted.

15 The invention also relates to a device for coding digital video data according to the MPEG standard for the insetting of at least one imagette into an image, comprising a subtractor receiving on a first input an intra macroblock and on a second input a predicted macroblock to be subtracted from the intra
20 macroblock so as to provide an inter macroblock, a circuit for selecting an inter or intra mode receiving the corresponding intra macroblock or inter macroblock for selecting one of the macroblocks according to an energy criterion, a circuit for transforming and quantizing the macroblock selected so as to provide a macroblock of quantized coefficients, a circuit for the variable-length coding of the macroblock of quantized coefficients and a buffer memory for providing a data stream at the output of the coding device, an inverse quantization and inverse transformation circuit for obtaining a macroblock reconstituted from the
25 macroblock of quantized coefficients, an adder of the reconstituted macroblock to the predicted macroblock so as to provide a reconstructed macroblock, a memory and predictor for storing the reconstructed macroblock and providing a reconstructed image, a motion estimator receiving the intra macroblock and the reconstructed macroblocks so as to provide a motion vector (MV) for the
30 memory and predictor so as to calculate the predicted block, a regulating circuit receiving information from the buffer memory so as to set a quantization interval for the transform and quantization circuit, characterized in that:

- the selection circuit and the motion estimation circuit receive an information item pertaining to an exclusion zone (ZE) which includes the macroblocks lying, even partially, in the location of the imagette,

- the selection circuit forces the intra-coding of the macroblocks belonging to this exclusion zone,

- the motion estimation circuit calculates the motion vectors while eliminating the motion vectors pointing from the blocks of the reconstructed image belonging to the exclusion zone.

According to a particular embodiment, the device is characterized in that the regulating circuit receives the information item defining an exclusion zone so as to adapt the quantization interval of the transform and quantization circuit for the macroblocks in this exclusion zone.

The principle of the invention consists in defining exclusion zones in the image, the coding of the image not belonging to the zones being performed independently of these zones, a motion vector pointing at an exclusion zone not being, as the case may be, taken into account. The inseting of an imagette into an image sequence can be carried out in a simple manner while limiting the decoding of the image to a predetermined zone.

The main advantage of the invention is that it avoids the use of complex and expensive equipment, namely professional decoders and coders. This is all the more true since the formats used, such as the high-definition television format or HDTV, require the utilization of complex equipment.

The decoding and coding of the image are either simply eliminated if the insertion is carried out at the level of the MPEG data stream, or limited to zones of the image which are coded in intra mode when working in baseband, allowing decoding and recoding of these zones by software not requiring any motion estimator and other complex decoding circuits.

BRIEF DESCRIPTION OF THE DRAWINGS

Other characteristics and advantages of the present invention will become more apparent from the following description given by way of example and with reference to the appended figures, in which:

- Figure 1 represents an exclusion zone in a reference image,
- Figure 2 represents a prohibited position of a predicted macroblock in the search window of the reference image,
- Figure 3 represents a coding device according to the invention,
- Figure 4 represents a motion estimator used by the coding device according to the invention.

DETAILED DESCRIPTION

In image coding systems with motion compensation such as the systems complying with the MPEG standard, the search for a motion vector in respect of a given image block is carried out with respect to a reference image previously processed and transmitted to the decoder.

Figure 1 shows a first image 1, called the source image, and a second image 2, called the reference image, from which the source image is coded. The coding of an image block 3 of the source image is performed by carrying out a correlation of this block with blocks of the same dimension which are contained in a search window in the reference image so as to determine a reference block which gives the best correlation. The coding then corresponds to a block of residuals. This block is obtained by luminance and chrominance differencing between the block of the source image and the reference block so as to provide a difference block, then by discrete cosine transformation of this difference block so as to provide a block of coefficients which is the block of residuals. The reference block is defined by a motion vector representing the displacement of the current block with respect to this reference block. The components of the motion vector are transmitted, together with the compressed data, in the MPEG data stream.

The size of the source images and of the reference images being identical, a vector can point towards any zone contained in the reference image.

The coding process according to the invention utilizes a motion estimation excluding the motion vectors pointing into one or more zones declared prohibited and corresponding to the imagerettes to be inset or mixed.

MARKED UP CLAIMS

1. (Amended) Process for coding images according [too] to the MPEG standard, for the inseting of at least one imagette into an image, utilizing the inter mode [(6, 7)] with motion estimation [(12)] with respect to a reference image and the intra mode [(7)], [characterized in that] wherein:

- an exclusion zone [(4)] which includes the macroblocks which lie even partially in the location of the imagette is defined in the reference image,
- the motion estimation [(12)] of the macroblocks of the image not belonging to the exclusion zone [cannot] does not take account of an image block belonging to the exclusion zone in the reference image.

- macroblocks belonging to the exclusion zone of the image are replaced by macroblocks making up the imagette.

2. (Amended) Process according to Claim 1, [characterized in that] wherein the inter mode for the coding of the macroblocks of the image belonging to an exclusion zone [(4)] is an inter mode with null motion vectors.

3. (Amended) Process according to Claim 1, [characterized in that] wherein the intra mode is forced for the coding of the macroblocks of the image belonging to an exclusion zone [(4)].

4. (Amended) Process according to Claim 1, [characterized in that] wherein it carries out a marking [(18,19)] of the macroblocks of the reference image belonging to the exclusion zone.

5. (Amended) Process according to Claim 4, [characterized in that] wherein the marking consists in performing a transcoding of the luminance values of the macroblocks by decrementing the values equal to the maximum coding value and then by forcing the luminance values of the macroblocks belonging to the exclusion zone to this maximum value.

6. (Amended) Process according to Claim 1, [characterized in that] wherein, for a given row of macroblocks, the coding [(14, 16)] allocates a specific slice for the macroblocks belonging to an exclusion zone.

5 7. (Amended) Process for inserting an imagette into an image coded according to the process of Claim 3, [characterized in that] wherein the macroblocks of an intra-coded slice are replaced by macroblocks relating to the imagette.

10 8. (Amended) Process according to Claim 7, [characterized in that] wherein the replacement consists of a recovery of the intra-coded macroblocks corresponding to the exclusion zones, a baseband decoding of these macroblocks, a mixing with the imagette to be inset into the exclusion zone, a coding of the image obtained so as to provide the replacement macroblocks.

15 9. (Amended) Process according to Claim 7, [characterized in that] wherein the coding adapts the quantization interval for the macroblocks belonging to the exclusion zone as a function of the cost of coding the macroblocks to be inserted.

20 10. (Amended) Device for coding digital video data according to the MPEG standard for the insetting of at least one imagette into an image, comprising a subtractor [(6)] receiving on a first input an intra macroblock and on a second input a predicted macroblock to be subtracted [form] from the intra
25 macroblock so as to provide an inter macroblock, a circuit [(7)] for selecting an inter or intra mode receiving the corresponding intra macroblock or inter macroblock for selecting one of the macroblocks according to an energy criterion, a circuit [(8)] for transforming and quantizing the macroblock selected so as to provide a macroblock of quantized coefficients a circuit [(13)] for the
30 variable-length coding of the macroblock of quantized coefficients and a buffer memory [(14)] for providing a data stream at the output of the coding device, an inverse quantization and inverse transformation circuit [(9)] for obtaining a

macroblock reconstituted [form] from the macroblock of quantized [coefficientsn]
coefficients in an adder [(10)] of the reconstituted macroblock, a memory and
 predictor [(11)] for storing the reconstructed macroblock and providing a
 reconstructed image, a motion estimator [(12)] receiving the intra macroblock
 5 and the reconstructed macroblocks so as to provide a motion vector [(MV)] for
 the memory and predictor so as to calculate the predicted block, a regulating
 circuit [(15)] receiving information form the buffer memory so as to set a
 quantization interval for the transform and quantization circuit [(8)],
 [characterized in that] wherein[:]:

- 10 - the selection circuit [(7)] and the motion estimation circuit [(12)]
 receive an information item pertaining to an exclusion zone [(ZE)] which includes
 the macroblocks lying, even partially, in the location of the imagette,
- the selection circuit [(7)] forces the intra-coding of the macroblocks
 belonging to this exclusion zone,
- the motion estimation circuit [(12)] calculates the motion vectors
 while eliminating the motion vectors pointing from the blocks of the
 reconstructed image belonging to the exclusion zone
- and in that it comprises a substitution circuit to substitute, in the data
stream, macroblocks corresponding to the exclusion zone by macroblocks coding
the imagette.

11. (Amended) Device according to Claim 10, [characterized in that]
wherein the regulating circuit [(15)] receives the information item defining an
 exclusion zone so as to adapt the quantization interval of the transform and
 25 quantization circuit [(8)] for the macroblocks in this exclusion zone.

16
ABSTRACT

The process utilizing the inter mode with motion estimation with respect to a reference image and the intra mode, wherein: an exclusion zone which includes the macroblocks which lie even partially in the location of the imagette is defined in the image, the motion estimation of the macroblocks of the image not belonging to the exclusion zone cannot take account of an image block belonging to the exclusion zone in the reference image. Applications relate to the coding of images which is compatible with the inserting of logos or other imagettes specific to the utilizer. They also relate to the real-time coding of images comprising insets.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

09/856844

**Process and device for coding images according to the MPEG standard
for the insetting of imagerettes**

5 The invention relates to an image coding process for the insetting of an imagerette into an image coded according to the MPEG standard.

Until the last few years, the images produced were generally transmitted and exchanged between television signal broadcasting operators in uncompressed form, that is to say in clear.

10 When it was necessary to adapt a source programme, the processing of the images was carried out on the basis of professional hardware. For example, when a director needed to utilize a report from a concurrent channel, he could readily, with the aid of a mixer, insert his own logo, information such as subtitles, the score of a match, etc. without additional equipment.

15 Now that the broadcasting and exchanging of data are performed in the form of compressed data, for example according to the MPEG standard, the insetting techniques require additional hardware: a decoder for bringing the compressed images into baseband at the input of the mixer, a coder for re-encoding the sequences after they have been modified. Moreover, to perform a
20 re-encoding of better quality, it may be necessary to implement a decoder/coder pair which is aware of how to manage assistance information which is added to the coded signal and passes through all the studio equipment before reaching the re-encoder, thereby making the system complex.

The purpose of the invention is to alleviate the aforesaid drawbacks.

25 Its subject is a process for coding images according to the MPEG standard, for the insetting of at least one imagerette into an image, utilizing the inter mode with motion estimation with respect to a reference image and the intra mode, characterized in that:

- 30 - an exclusion zone which includes the macroblocks which lie even partially in the location of the imagerette is defined in the image,
- the motion estimation of the macroblocks of the image not belonging to the exclusion zone cannot take account of an image block belonging to the exclusion zone in the reference image.

35 According to a particular mode of implementation, the inter mode for the coding of the macroblocks of the image belonging to an exclusion zone is an inter mode with null motion vectors.

According to a particular mode of implementation, the intra mode is forced for the coding of the macroblocks of the image belonging to an exclusion zone.

5 According to a particular mode of implementation, it carries out a marking of the macroblocks of the reference image belonging to the exclusion zone.

According to a particular mode of implementation, the marking consists in performing a transcoding of the luminance values of the macroblocks by decrementing the values equal to the maximum coding value and then by forcing the luminance values of the macroblocks belonging to the exclusion zone to this maximum value.

According to a particular mode of implementation, for a given row of macroblocks, the coding allocates a specific slice for the macroblocks belonging to an exclusion zone.

15 The invention also relates to a process for inserting an imagette into an image coded according to the process described above, characterized in that the macroblocks of an intra-coded slice are replaced by macroblocks relating to the imagette.

According to a particular mode of implementation, the replacement consists of a recovery of the intra-coded macroblocks corresponding to the exclusion zones, a baseband decoding of these macroblocks, a mixing with the imagette to be inset into the exclusion zone, a coding of the image obtained so as to provide the replacement macroblocks.

25 According to a particular mode of implementation, the quantization interval for the coding of the macroblocks belonging to the exclusion zone is a function of the cost coding the macroblocks to be inserted.

The invention also relates to a device for coding digital video data according to the MPEG standard for the inseting of at least one imagette into an image, comprising a subtractor receiving on a first input an intra macroblock and on a second input a predicted macroblock to be subtracted from the intra macroblock so as to provide an inter macroblock, a circuit for selecting an inter or intra mode receiving the corresponding intra macroblock or inter macroblock for selecting one of the macroblocks according to an energy criterion, a circuit for transforming and quantizing the macroblock selected so as to provide a macroblock of quantized coefficients, a circuit for the variable-length coding of the macroblock of quantized coefficients and a buffer memory for providing a data stream at the output of the coding device, an inverse quantization and

inverse transformation circuit for obtaining a macroblock reconstituted from the macroblock of quantized coefficients, an adder of the reconstituted macroblock to the predicted macroblock so as to provide a reconstructed macroblock, a memory and predictor for storing the reconstructed macroblock and providing a reconstructed image, a motion estimator receiving the intra macroblock and the reconstructed macroblocks so as to provide a motion vector (MV) for the memory and predictor so as to calculate the predicted block, a regulating circuit receiving information from the buffer memory so as to set a quantization interval for the transform and quantization circuit, characterized in that:

10 - the selection circuit and the motion estimation circuit receive an information item pertaining to an exclusion zone (ZE) which includes the macroblocks lying, even partially, in the location of the imagette,

 - the selection circuit forces the intra-coding of the macroblocks belonging to this exclusion zone,

15 - the motion estimation circuit calculates the motion vectors while eliminating the motion vectors pointing from the blocks of the reconstructed image belonging to the exclusion zone.

 According to a particular embodiment, the device is characterized in that the regulating circuit receives the information item defining an exclusion zone so as to adapt the quantization interval of the transform and quantization circuit for the macroblocks in this exclusion zone.

20 The principle of the invention consists in defining exclusion zones in the image, the coding of the image not belonging to the zones being performed independently of these zones, a motion vector pointing at an exclusion zone not being, as the case may be, taken into account. The inseting of an imagette into an image sequence can be carried out in a simple manner while limiting the decoding of the image to a predetermined zone.

25 The main advantage of the invention is that it avoids the use of complex and expensive equipment, namely professional decoders and coders. This is all the more true since the formats used, such as the high-definition television format or HDTV, require the utilization of complex equipment.

30 The decoding and coding of the image are either simply eliminated if the insertion is carried out at the level of the MPEG data stream, or limited to zones of the image which are coded in intra mode when working in baseband, allowing decoding and recoding of these zones by software not requiring any motion estimator and other complex decoding circuits.

Other characteristics and advantages of the present invention will become more apparent from the following description given by way of example and with reference to the appended figures, in which:

- Figure 1 represents an exclusion zone in a reference image,
- 5 - Figure 2 represents a prohibited position of a predicted macroblock in the search window of the reference image,
- Figure 3 represents a coding device according to the invention,
- Figure 4 represents a motion estimator used by the coding device according to the invention.

10 In image coding systems with motion compensation such as the systems complying with the MPEG standard, the search for a motion vector in respect of a given image block is carried out with respect to a reference image previously processed and transmitted to the decoder.

Figure 1 shows a first image 1, called the source image, and a
15 second image 2, called the reference image, from which the source image is coded. The coding of an image block 3 of the source image is performed by carrying out a correlation of this block with blocks of the same dimension which are contained in a search window in the reference image so as to determine a reference block which gives the best correlation. The coding then corresponds
20 to a block of residuals. This block is obtained by luminance and chrominance differencing between the block of the source image and the reference block so as to provide a difference block, then by discrete cosine transformation of this difference block so as to provide a block of coefficients which is the block of residuals. The reference block is defined by a motion vector representing the
25 displacement of the current block with respect to this reference block. The components of the motion vector are transmitted, together with the compressed data, in the MPEG data stream.

30 The size of the source images and of the reference images being identical, a vector can point towards any zone contained in the reference image.

The coding process according to the invention utilizes a motion estimation excluding the motion vectors pointing into one or more zones declared prohibited and corresponding to the imagerettes to be inset or mixed.

35 More precisely, the imagerette which is intended to be inserted into the image and which may be of any dimension, defines a location in the image. The zone declared prohibited or exclusion zone has macroblock resolution, that is to say it corresponds not only to the collection of macroblocks of the image lying

wholly within this location but also to the macroblocks encroaching on this location.

An exclusion zone (ZE) or prohibited zone 4 is represented in the reference image 2. This zone is defined for example on the basis of the coordinates of the points Ba and Ea which lie respectively at the top left and at the bottom right of the zone, that is to say at the start of the zone and at the end of the zone when considering television scanning. These coordinates are the numbers of the macroblocks enclosing these points or row numbers and macroblock numbers within the row. This zone can also be defined by the numbers of the macroblocks constituting the zone.

A motion vector $V_{x,y}$ is calculated on the basis of the previously mentioned correlation step. It designates, in our example, a block lying in the prohibited zone. According to the process of the invention, this block is not adopted for the coding of the block 3.

In Figure 2, the same references are used to designate the elements which are common to Figure 1. In this example, the search window 5 inside which a search is made for the block best correlated with the current block 3 is represented shaded. The block defined on the basis of the motion vector $V_{x,y}$ encroaches on the exclusion zone 4 and this motion vector is also not adopted.

The motion vector adopted will be the one which gives the best correlation and does not designate a block encroaching into the prohibited zone. The blocks designated in the search window and which contain points belonging to the exclusion zone are therefore excluded from the final choice in respect of a given macroblock. If all the possible positions in the search window encroach on the exclusion zone, then the motion vector, for the relevant macroblock, is forced to zero.

This is the process which is utilized by the motion estimator involved in the make-up of the global coding device. Let us give below a description of this coding device represented in Figure 3.

The source images of the image sequence, after digital coding, reordering and chopping into macroblocks according to the MPEG standard, are transmitted to the input I_s of the device, macroblock by macroblock. This input is connected in parallel to a first input of a subtractor 6, to a first input of an inter/intra mode selector 7 and to a first input of a motion estimator 12. The output of the subtractor is connected to the second input of the mode selector 7. The output of the selector is connected to a first input of a coding circuit 8 which carries out a discrete cosine transformation of the macroblocks received

and a quantization of the macroblocks of coefficients obtained. These macroblocks are transmitted to a variable-length coding circuit 13 and then to a buffer memory 14, one output of which is the output of the device delivering the coded data in the form of a data stream. The variable-length coding circuit 13 exchanges data with a syntax generator 16 for configuring the data stream transmitted. It also receives the motion information originating from the motion estimator 12. A second output of the buffer memory 14 is connected to a regulating circuit 15 which transmits information to the coding circuit 8 on a second input.

The coded macroblock exiting the coding circuit 8 is also transmitted to a decoding circuit 9 carrying out the operations inverse to those of the coding circuit 8. The macroblock thus reconstituted is transmitted to a first input of an adder 10. The output of the adder is connected to a first input of a memory and prediction circuit 11 which supplies a predicted macroblock on an output. This macroblock is transmitted to the second input of the subtractor 6 and to the second input of the adder 10.

On a second input, the motion estimator 12 receives the macroblocks of the reconstructed image originating from a second output of the memory and prediction circuit 11. In return it supplies motion information to this circuit.

The selection circuit 7, regulating circuit 15, motion estimation circuit 12 and syntax generation circuit 16 receive, on the other hand, information relating to the exclusion zones in the image.

A current macroblock of the source image is received on the input of the device. This macroblock, called an intra macroblock in this form, is transmitted to the first input of the subtractor 6. The latter subtracts a predicted macroblock from this intra macroblock so as to supply a difference macroblock, also called an inter macroblock. On the first input, the inter/intra selector receives the intra macroblock and, on the second input, it receives the inter macroblock and selects one of these macroblocks as a function of energy criteria, for example their coding cost. If the inter macroblock is selected, then an inter coding mode is involved, if the intra macroblock is selected, then an intra coding mode is involved. The macroblock selected is thereafter transformed by a discrete cosine transformation so as to give a block of coefficients and is then quantized as a function of a quantization interval calculated by the regulating circuit 15. The macroblock of quantized coefficients is coded according to a variable-length coding by the variable-length coder 13

also called a VLC coder. Appended to the data received by this coder 13 is the information transmitted by the syntax generator 16 so as to make it possible to generate, from these data, a stream of data according to the syntax relating to the MPEG standard. These data are thereafter transmitted to the buffer
5 memory 14 whose fill level is supplied to the regulating circuit 15 which controls the quantization interval for the coefficients of the macroblocks accordingly so as to regulate the bit rate.

The macroblock of quantized coefficients is transmitted to the decoding circuit 9 so as to supply a reconstructed macroblock to the memory
10 and prediction circuit 11, after adjoining the corresponding predicted macroblock. The storing of these macroblocks provides a reconstructed image. The reconstructed macroblocks are transmitted to the motion estimator 12 for the calculation of motion vectors (MV) relating to the current macroblock of the source image, as explained later with regard to Figure 4. The motion vectors
15 received by the memory and prediction circuit make it possible to define the macroblock, in the reconstructed image, which is used as predicted macroblock for the coding of the current macroblock.

The syntax generation circuit 16, the selection circuit 7, the regulating circuit 15 and the motion estimation circuit 12 receive the information
20 (ZE) relating to the exclusion zones which are the image zones in which it is desired to insert or mix additional information, for example a logo, a digit, a subtitle, etc.

The MPEG coding requires that the image be chopped into slices, a slice being a continuous series of macroblocks all forming part of the same
25 horizontal row of macroblocks, according to the MPEG definition. A slice is therefore composed of 16 video lines.

A slice is preceded by a header readily identified by a decoder. In the "50 Hz" standard television format, the 576 useful lines are distributed into 36 slices, a slice then corresponding to a row and stretching over the width of
30 the image. The standard also makes it possible to perform finer chopping by defining several slices in the same row, that is to say over one image width.

It is this possibility which is utilized for the coding of the lines of which a part belongs to the exclusion zone. Thus the relevant macroblocks are grouped together into specific slices for which a bit belonging to the header
35 flags the fact that they are all coded in intra mode. Thus, for a given row, the syntax generation circuit generates a slice header for the first macroblock belonging to an exclusion zone. Likewise for the first macroblock no longer

belonging to the exclusion zone. The number of slices generated for a given row is thus dependent on the number of exclusion zones in this row.

The act of passing from one slice to another on entering an exclusion zone makes it possible to isolate oneself from the previous slice. Although a macroblock is coded in intra mode, the DC coefficient of this macroblock calls upon the DC coefficient of the previous macroblock in the same slice. The coding of this macroblock is thus dependent on the previous macroblock except for the first macroblock of each slice. Changing slice thus makes it possible to isolate oneself completely from the current surrounding image for the coding of the exclusion zone. This is necessary when decoding the exclusion zone since one chooses to decode this zone only, and when inserting the macroblocks corresponding to the imagette into the exclusion zone, which macroblocks should not call upon information outside this zone.

The exclusion zones of an image are translated, by a processing circuit (not represented in the figure), into row numbers and macroblock numbers within the row (or numbers of the macroblocks in the image) as indicated earlier. This information ZE is transmitted to the inter/intra mode selection circuit 7 which counts the rows and the macroblocks processed in the row (or the macroblocks processed in the image) and forces the coding in intra mode when the current macroblock received corresponds to a macroblock of the exclusion zone. This information is also transmitted to the syntax generation circuit which triggers the generation of a new slice in the VLC coding circuit for each macroblock group belonging to an exclusion zone, doing so for each row. This information is also transmitted to the regulating circuit 15. Thus, this circuit can force the quantization interval used by the quantizer 8 to a value below that calculated by the regulating circuit as a function of the filling of the buffer memory so as to improve the resolution of the exclusion zone. This makes it possible, when the imagettes to be substituted are of more expensive coding than that of an exclusion zone of the original image, to artificially increase the cost of coding this exclusion zone, facilitating the substitution of the macroblocks in the data stream. Another solution would consist in reducing the resolution of the imagettes so that their coding cost is not greater than that of the exclusion zones of the original image. This information is finally transmitted to the motion estimator so as to prevent it from choosing motion vectors which point into an exclusion zone according to the device made explicit in Figure 4.

The various circuits receiving the macroblock numbers and row numbers relating to the exclusion zones are equipped with counters for identifying the macroblock processed.

The above description relates to the coding of a sequence of images so as to make it compatible with the insertion of imagerettes into predefined zones. It is thus possible, for any user of these data, to extract the data relating to the exclusion zones, this involving the macroblocks belonging to a slice and which are intra-coded, and to mix these data with user-specific data. If a simple insertion rather than a mixing is involved, the specific data replace the data relating to the exclusion zones.

By virtue of the previously described coding device, it is possible to produce data streams (coded image sequences) in which the macroblocks belonging to the exclusion zone are coded solely in intra mode and are grouped together in particular slices called "intra slices".

In fact, each image undergoes a standard MPEG2 coding processing, except for the exclusion zone. This particular shaping is absolutely transparent to a decoder, for example of the mass market type, which is content to receive, decode and display the images.

On the other hand, when the existence of an exclusion zone is known in a compressed sequence, it is possible to perform the decoding, mixing/insetting and re-encoding processing operations solely on the relevant zone. This can be performed with the aid of a PC-type (Personal Computer) computing machine, that is to say by purely software processing, since the decoding, mixing/insetting and re-encoding are limited to the exclusion zone which is always of small dimension and coded solely with information belonging to the current image; there is no prediction or motion compensation to be calculated.

A slightly modified form of the coding device can be used, if the specific data to be inserted into the images are known a priori.

In this case, the syntax generation circuit 16 possesses a memory or receives from outside the specific data to be inserted, in the form of macroblocks constituting imagerettes coded in intra mode. This circuit carries out a substitution, in the VLC coding circuit, of the macroblocks corresponding to the intra coding of the exclusion zones with the macroblocks coding the imagerettes. It is thus possible to supply a data stream directly with the insertion of imagerettes or logos.

The coding of the imagerettes in the form of macroblocks of quantized coefficients can be carried out readily, when no longer working in real time, based on software processing (part of the algorithm of the MPEG coding) of the imagerettes in baseband, coded in digital.

5 Figure 4 represents a motion estimation device used in the previously described coding device.

 A macroblock of a current image to be coded or a source image is received on a first input of the motion estimation device 12. It is transmitted to the input of a circuit for calculating the motion vectors 17. The macroblocks of the reference image are received on a second input of the motion estimator 12 and are transmitted to the input of a transcoding circuit 18. This circuit transmits the transcoded luminance values of the macroblocks to a marking circuit 19 for marking the macroblocks belonging to an exclusion zone. The information relating to the exclusion zones (ZE) is received on a third input of the motion estimator 12 which transmits it to a second input of the marking circuit 19. This marking circuit is connected to a memory 20. The circuit for calculating the motion vectors is also connected to the memory 20. At its output, which is also the output of the motion estimator, it supplies the motion vectors (MV) corresponding to each macroblock of the source image.

20 The macroblocks of the source image are received by the circuit for calculating the motion vectors 17. These are the macroblocks transmitted as input to the coding device of Figure 3. The macroblocks of the reference image are the macroblocks reconstructed and transmitted by the memory and prediction circuit 11.

25 The values of the points or pixels processed by the motion estimator are normally represented on eight bits, i.e. a coding of the luminance values between 0 and 255. The macroblocks of the reference image are transmitted to a transcoding circuit 18 which pulls the coding of the luminance values to between 0 and 254, for example by coding the value 255 by the value 254. This does not impair the quality of the estimation, especially since 255 is a value which is rarely achieved in reference images.

 The luminance values thus transcoded are transmitted to a marking circuit 19. This circuit also receives the information relating to the exclusion zone (ZE) for the current processed image.

35 This information is for example the slice number and numbers of the macroblock in this slice, these numbers corresponding to the upper left corner of the exclusion zone and the numbers of the slice and of the macroblock lying

in the lower right corner. The dimensions of the exclusion zone or zones are defined a priori and once per image on the basis of these pairs of numbers. This zone can be positioned anywhere in the image and can take all or part of the size of the reference images.

5 The macroblocks received by the marking circuit are counted for each row and those belonging to the exclusion zone are forced to 255. In fact, only the luminance blocks constituting a macroblock are relevant, the motion estimation taking no account of the chrominance blocks. The luminance value of all the pixels constituting these blocks, i.e. 8 x 8 values for each of the four
10 luminance blocks, is forced to 255. The luminance values thus coded are transmitted to a reference image memory 20 which stores the luminance values thus coded for each image. The information item relating to the exclusion zone is thus carried by these luminance values. This is then referred to as the marking of the exclusion zone or zones.

15 For each source image macroblock received on the other input of the motion estimator, the circuit for calculating the motion vectors will search, in this image memory 20 or more exactly in a search window of this image, for the luminance blocks best correlated with the luminance blocks of this macroblock, as indicated previously.

20 If the correlation calculations determine a marked luminance block, this block is ignored. The unmarked block giving the best correlation is chosen. If all the blocks of the search window belong to the exclusion zone, then the motion vector is forced to zero for the relevant macroblock.

 Of course, this is merely an example, the marking consisting, in a
25 more general manner, in performing a transcoding of the luminance values of the macroblocks by decrementing the values corresponding to the maximum coding value and then by forcing the luminance values of the macroblocks belonging to the exclusion zone to this maximum value.

 The examples given describe an intra-mode coding of the
30 macroblocks of the image belonging to the exclusion zone. The invention is not limited to this particular embodiment. It is entirely conceivable to code these macroblocks in inter mode together with null motion vectors or even in motion-compensated inter mode by taking account, for the calculation of the motion vectors from the reference image, of none but the blocks belonging to the
35 exclusion zone of the reference image. In this case, the circuit for calculating the motion vectors, for a block of the exclusion zone, will have access to a memory which has stored the blocks of the reconstructed exclusion zone. The

aim is to code the macroblocks belonging to the exclusion zone of the image in such as to be independent of the remainder of the image.

- The definition of exclusion zone can be extended to any form provided that a specific processing element is capable of managing it. The latter
5 may very well be situated outside or inside the motion estimator.

The applications relate to the coding of images which is compatible with the inserting of logos or other imagerettes specific to the utilizer. They also relate to the real-time coding of images comprising insets.

CLAIMS

5 1. Process for coding images according too the MPEG standard, for the insetting of at least one imagette into an image, utilizing the inter mode (6, 7) with motion estimation (12) with respect to a reference image and the intra mode (7), characterized in that:

10 - an exclusion zone (4) which includes the macroblocks which lie even partially in the location of the imagette is defined in the reference image,

 - the motion estimation (12) of the macroblocks of the image not belonging to the exclusion zone does not take account of an image block belonging to the exclusion zone in the reference image.

15 - macroblocks belonging to the exclusion zone of the image are replaced by macroblocks making up the imagette.

 2. Process according to Claim 1, characterized in that the inter mode for the coding of the macroblocks of the image belonging to an exclusion zone (4) is an inter mode with null motion vectors.

20 3. Process according to Claim 1, characterized in that the intra mode is forced for the coding of the macroblocks of the image belonging to an exclusion zone (4).

 4. Process according to Claim 1, characterized in that it carries out a marking (18,19) of the macroblocks of the reference image belonging to the exclusion zone.

25 5. Process according to Claim 4, characterized in that the marking consists in performing a transcoding (18) of the luminance values of the macroblocks by decrementing the values equal to the maximum coding value and then by forcing the luminance values of the macroblocks belonging to the exclusion zone to this maximum value.

30

6. Process according to Claim 1, characterized in that, for a given row of macroblocks, the coding (14, 16) allocates a specific slice for the macroblocks belonging to an exclusion zone.

5 7. Process for inserting an imagette into an image coded according to the process of Claim 3, characterized in that the macroblocks of an intra-coded slice are replaced by macroblocks relating to the imagette.

8. Process according to Claim 7, characterized in that the replacement consists of a recovery of the intra-coded macroblocks
10 corresponding to the exclusion zones, a baseband decoding of these macroblocks, a mixing with the imagette to be inset into the exclusion zone, a coding of the image obtained so as to provide the replacement macroblocks.

9. Process according to Claim 7, characterized in that the coding
15 adapts the quantization interval for the macroblocks belonging to the exclusion zone as a function of the cost of coding the macroblocks to be inserted.

10. Device for coding digital video data according to the MPEG
standard for the insetting of at least one imagette into an image, comprising
20 a subtractor (6) receiving on a first input an intra macroblock and on a second input a predicted macroblock to be subtracted from the intra macroblock so as to provide an inter macroblock, a circuit (7) for selecting an inter or intra mode receiving the corresponding intra macroblock or inter macroblock for selecting one of the macroblocks according to an energy
25 criterion, a circuit (8) for transforming and quantizing the macroblock selected so as to provide a macroblock of quantized coefficients a circuit (13) for the variable-length coding of the macroblock of quantized coefficients and a buffer memory (14) for providing a data stream at the output of the coding device, an inverse quantization and inverse transformation circuit (9) for
30 obtaining a macroblock reconstituted from the macroblock of quantized coefficients an adder (10) of the reconstituted macroblock, a memory and

predictor (11) for storing the reconstructed macroblock and providing a reconstructed image, a motion estimator (12) receiving the intra macroblock and the reconstructed macroblocks so as to provide a motion vector (MV) for the memory and predictor so as to calculate the predicted block, a regulating circuit (15) receiving information from the buffer memory so as to set a quantization interval for the transform and quantization circuit (8), characterized in that::

- the selection circuit (7) and the motion estimation circuit (12) receive an information item pertaining to an exclusion zone (ZE) which includes the macroblocks lying, even partially, in the location of the imagerie,
- the selection circuit (7) forces the intra-coding of the macroblocks belonging to this exclusion zone,
- the motion estimation circuit (12) calculates the motion vectors while eliminating the motion vectors pointing from the blocks of the reconstructed image belonging to the exclusion zone

and in that it comprises a substitution circuit to substitute, in the data stream, macroblocks corresponding to the exclusion zone by macroblocks coding the imagerie.

11. Device according to Claim 10, characterized in that the regulating circuit (15) receives the information item defining an exclusion zone so as to adapt the quantization interval of the transform and quantization circuit (8) for the macroblocks in this exclusion zone.

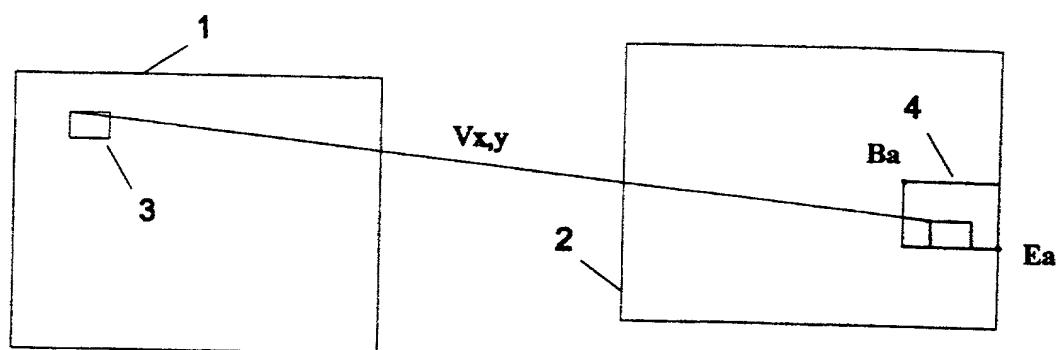


FIG. 1

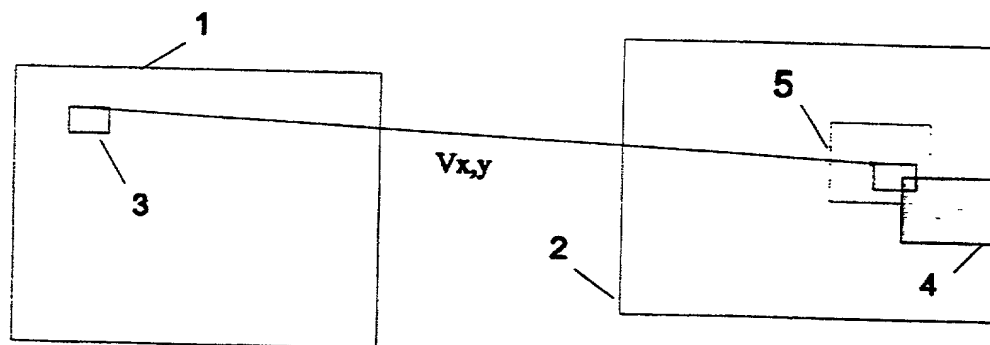


FIG. 2

2/2

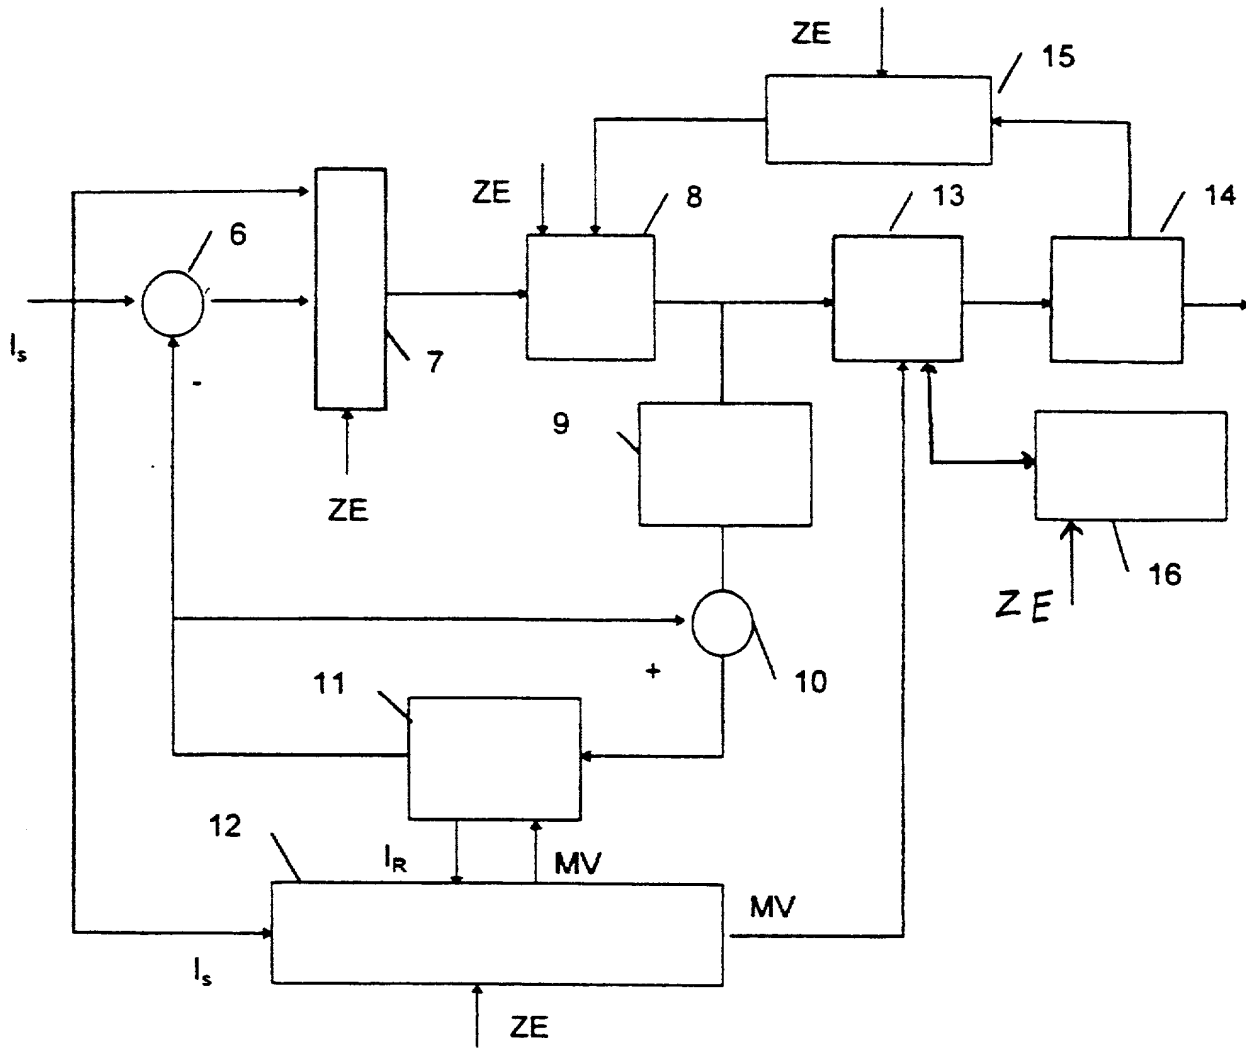


Fig. 3

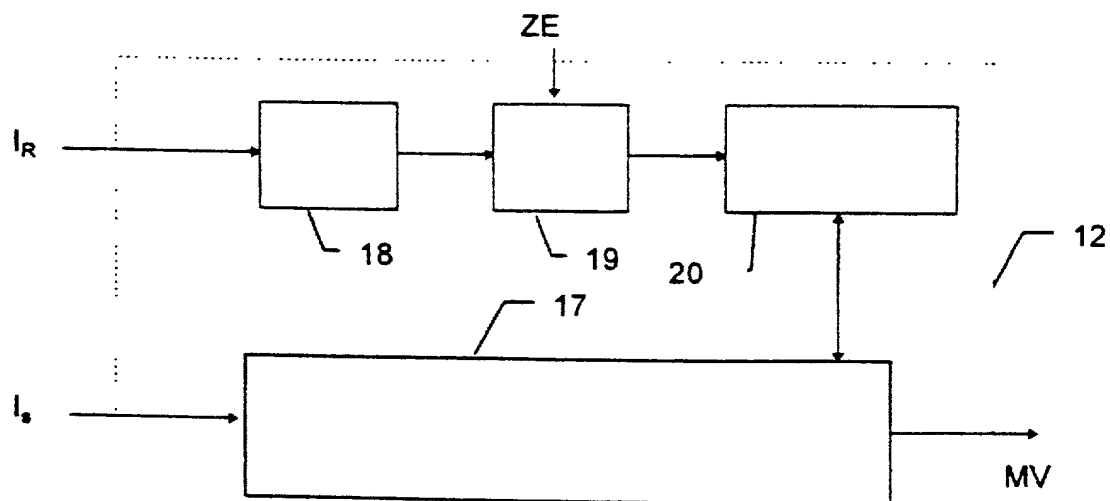


Fig. 4

DECLARATION FOR UNITED STATES PATENT APPLICATION,
POWER OF ATTORNEY, DESIGNATION OF CORRESPONDENCE ADDRESS

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name, and that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

PROCESS AND DEVICE FOR CODING IMAGES ACCORDING TO THE MPEG STANDARD FOR THE INSETTING OF IMAGETTES

the specification of which

(CHECK ONE) () is attached hereto.
(XX) was filed on November 11, 1999, Application Serial. No. PCT/FR99/09025 and was amended on .

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 CFR 1.56(a).

I hereby claim foreign priority benefits under 35 USC 119 of any foreign application(s) for patent, utility model, design or inventor's certificate having a filing date before that of the application(s) on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
Number	Country	Date Filed	Yes	No
9814851	FR	November 25, 1998	xx	

I hereby claim the benefit under 35 USC 120 of any US Application(s) listed below, and, insofar as the subject matter of each of the claims of this Application is not disclosed in the prior US application in the manner provided by the first paragraph of 35 USC 112, I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 CFR 1.56(a).

Serial No.: _____ Filed: _____

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under of 18 USC 1001 and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Joseph S. Tripoli (Reg. No. 26,040), Dennis H. Irlbeck (Reg. No. 26,372), Eric Herrmann (Reg. No. 29,169) and Joseph J. Laks (Reg. No. 27,914) Telephone: (609) 734-9813.

Address all correspondence to Joseph S. Tripoli, Patent Operations - Thomson multimedia Licensing, Inc. - CN 5312 - Princeton, New Jersey 08543-0028.

Signature: _____ Date: 4 day of April, 2001.

Sole or First Joint Inventor: Frédéric Plissonneau

Citizenship: FR

Residence and Post Office Address:

8 rue Marguerite Philippe
F- 35235 Thorigné Fouillard
France

FR

Signature: _____ Date: 9th day of April, 2001.

Sole or First Joint Inventor: Jean-Yves Aubie

Citizenship: FR

Residence and Post Office Address:

La Mare Maheu
F- 35520 Melesse
France

FR